
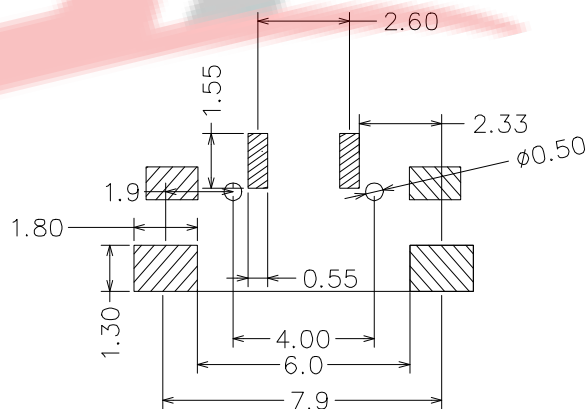
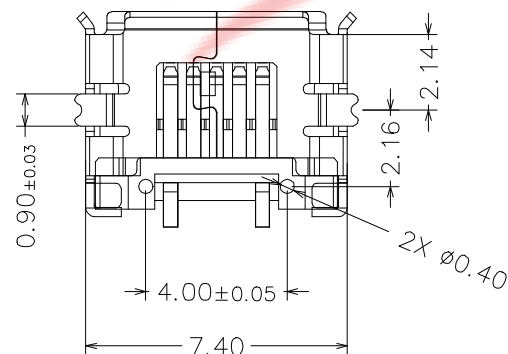
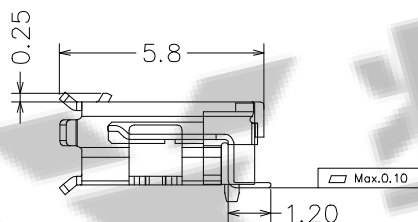
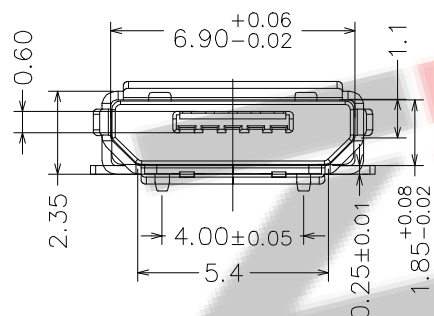



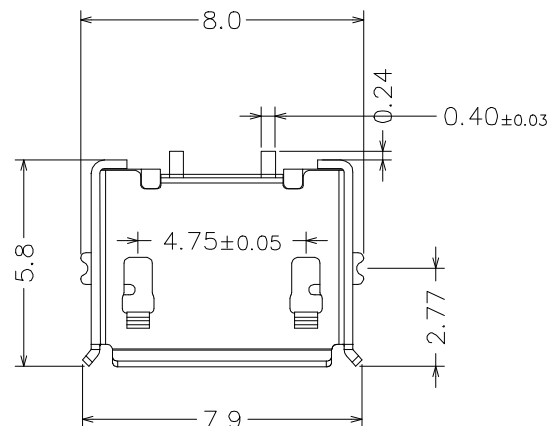

RECOMMENDED P.C.B LAYOUT (TOP VIEW)
EFFECTIVE TOLERANCE: ±0.05

规格说明: Specifications:

电气特性: Electrical:

1. 额定电流: Current Rating
3.0A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
100 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
100MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf (MAX)
Unmate force: 1.02kgf (MIN)
2. 端子保持力: Terminal Retention
0.5kgf (MIN)

原材料: Material:

1. 塑胶: Housing:
High Temperature Plastic,
LCP White/Black
2. 端子: Contact: Copper Alloy C2680/c5191
3. 外壳: Shell: Copper Alloy C2680/SUS

电镀: Plating:

1. 端子: Contact: Plated Gold in Mating Area;
Matte Tin On Solder Tails
2. 外壳: Shell:
Plated Matte tin, Salt spray test: 24 hours



深圳市兆达鑫科技有限公司
Shenzhen Zhao Xin Technology Co., Ltd.

TOLERANCE:
X.XX ±0.30
X.XXX ±0.10
X.X ±0.10
X.X ±0.05



UNIT: mm [inch]
SCALE: 1:1 SIZE: A4

DRAWN BY:

刘志强

DATE:

2015.08.18

PART NAME:

MC2P母座5.9板大电流卷边

CHECKED BY:

李毅

DATE:

2015.08.18

PART NO.

MOLD NO.

SEE TABLE

APPROVED BY:

张少辉

DATE:

2015.08.18

DRAW NO:

SHEET NO.

ZDXMICROM30008

1 OF 1