



产品参数:

1. 额定负荷: DC 30V 0.1A
2. 接触电阻: 100m
3. 绝缘阻抗: AC 500V 1Minute
4. 使用温度: - 25 + 85
5. 操作力: 30 ± 15 gf
6. 机械寿命: 3,000,000Cycles
7. 行程: 8.30 ± 0.30
8. 定制选择: AC 125V 1A-3A

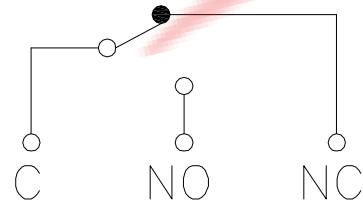

Circuit Diagram

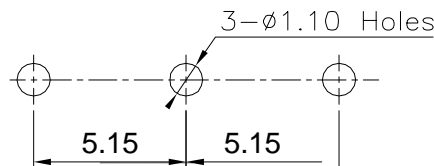

P.C.B layout

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑥	Shrapnel	—	1	Beryllium Copper	—	—
⑤	Contact	—	1	Ag	—	—
④	Terminal	—	3	Brass(0.52t)	Plating silver	—
③	Housing	—	1	PBT	White	—
②	Knob	—	1	PBT	White	—
①	Cover	—	1	PBT	Black	—

APPROVALS			DATE			
DRAWN	刘志强	2015.08.18	深圳市兆达鑫科技有限公司 Shenzhen Zhao Xin Technology Co., Ltd.			
CHECKED	李文毅	2015.08.18				
APPROVALS	张少辉	2015.08.18				
			TITLE:	MICRO SWITCHS		
			PART NO.	MX-1382-A15		
TOLERANCES ARE	30~以上	± 0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ:
	10~30	± 0.20				
	5~10	± 0.15				
	~ 5	± 0.10	$\pm 2'$	DRAWING NO.		SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			