


CHARACTERISTICS	
OPERATING FORCE (OF):	200gf Max.
RELEASE FORCE (RF):	30gf Min.
OPERATING POSITION:	3.7 ± 0.6 mm.
PRE TRAVEL:	3.5mm Max.
DIFFERENTIAL TRAVEL:	0.6mm Max.
FREE POSITION:	6.8mm Max.

ELECTRICAL DATA	
<b>RATING</b>	<b>OPERATING LIFE</b>
3A 12VDC	100,000 CYCLES
0.1A 48VDC 125/250VAC	100,000 CYCLES
<b>MECHANICAL LIFE</b>	<b>500,000 CYCLES</b>
<b>GAP TYPE</b>	<b>MICRO</b>
<b>OPERATING TEMP</b>	<b>-20°C ~ +85°C</b>
<b>WATERGROOF</b>	<b>IP67</b>

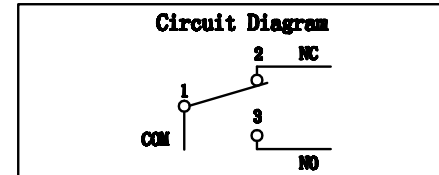


TOLERANCE UNLESS OTHERWISE SPECIFIED

≠	1~3	3~10	10~30	30~100	100~200	ANGLE
±0.2	±0.3	±0.4	±0.6	±1.0	±1.5	±3.0°

深圳市兆达鑫科技有限公司  
Shenzhen Zhao Xin Technology Co., Ltd.

DRAFTED BY	BING WANG	DATE	2020-6-15
CHECKED BY	GUO FU LUO	DATE	2020-6-15
APPROVED BY	MATH	DATE	2020-6-15



ZDX-HS-001-02